

CONVERGENCE
ENHANCED MULTIMEDIA
MULTIMEDIA
VALUE

# MSM6025™ Chipset Solution

## Affordable, accessible 3G wireless for all

The QUALCOMM® Value Platform has been designed to expand the market for voice and data services by offering affordable chipsets that support 3G CDMA2000® 1X and WCDMA (UMTS), with backward compatibility for 2G standards. Now basic color screens, position-location services, music, ringtones and voice-recognition features will be available to a much wider market.

The Value Platform can offer a vast audience of handset users — including those new to wireless — their first taste of the power of 3G networks, creating lucrative opportunities for manufacturers and operators alike. The integrated chipset design of the Value Platform allows manufacturers to quickly and cost-effectively bring handsets to market, while the integrated selection of Launchpad™ suite of integrated technologies enables operators to provide entry-level customers with exciting new services that encourage voice and data usage and ultimately increase average revenue per user (ARPU).

The Value Platform creates a seamless path to move customers up to 3G networks. Using QUALCOMM's proven, reliable wireless technology, manufacturers and operators can offer a range of entry-level phones with more features, at less cost than ever before.



NOW BASIC COLOR SCREENS, MUSIC, RINGTONES AND VOICE-RECOGNITION FEATURES WILL BE AVAILABLE TO A MUCH WIDER MARKET.



### PERFORMANCE

#### Efficient design to cut manufacturing costs and time to market

- Air interfaces supported:
  - CDMA2000 1X (Release 0)
  - IS-95 A/B
- High-performance ARM7TDMI® microprocessor
- Embedded QDSP4000™ digital signal processor core
- Enhanced memory support for page mode NOR FLASH, NAND FLASH memory interface and SRAM/pseudo SRAM
- Integrated wideband mono voice CODEC
- Pin compatible with QUALCOMM's MSM6050™ chipset solution
- 153.6 kbps forward-link/reverse-link data support speeds on CDMA2000 1X Rel. 0 networks
- 208-pin fine-pitch ball grid array (FBGA) package
- Open BREWapi™ software for developing handset UI and BREW® applications

# MSM6025™ Chipset Solution

The Mobile Station Modem™ (MSM™) MSM6025™ chipset solution for CDMA2000 1X helps cut the costs to produce entry-level data-enabled devices for emerging markets worldwide. And by incorporating both digital and analog functions in a single chip, manufacturers can benefit from reduced bill-of-materials costs.

## TECHNOLOGY FOR INDISPENSABLE HANDSETS AND MUST-HAVE APPLICATIONS

Popular features that meet consumer demand, boost airtime usage and drive in-demand applications

- CMX™ multimedia software for customized ringtones, screensavers and greeting cards:
  - MIDI-based voice (up to 32 polyphony)
  - Playback support for compact MIDI, General MIDI, SMAF™ (audio only) and SP-MIDI
- PureVoice® Audio AGC (automatic gain control) for better calls, especially under noisy conditions
- Digital audio support for MP3
- SMS capability to tap into the enormous market for text messaging
- R-UIM removable card interface to support transfer of personal data to new devices without reprogramming
- Integrated Universal Serial Bus (USB) support



## OPTIMIZED RF AND PMIC SOLUTIONS


QUALCOMM's radioOne® zero-IF radio frequency and powerOne™ power management solutions are optimized for our MSM chipsets for high-efficiency, price-competitive wireless devices. Expect a higher return on investment with our integrated solution — fewer discrete parts means lower development costs, lower BOM costs and ultimately lower handset costs. With our innovative RF CMOS processing technology and lead-free packaging solutions, handset manufacturers can be confident that wireless devices based on our complete solutions will be power efficient, dependable and cost competitive.



## MSM6025 | AVAILABLE RF & PM CHIPSET COMBINATIONS

RF Chipset Configurations		RFL6000™ RFR6000™ RFT6100™	RFR6120™ RFT6120™	RFR6170™ RFT6170™	RFR6122™ RFT6122™	RFR6155™ RFT6150™
Power Management IC		PM6620™ PM6630™ PM6640™	PM6620™ PM6630™ PM6640™	PM6620™ PM6630™ PM6640™	PM6620™ PM6630™ PM6640™	PM6620™ PM6630™ PM6640™
CDMA2000	450 MHz			■		
	CELL 850 MHz	■	■		■	■
	JCDMA 800 MHz	■	■		■	■
	KPCS 1700 MHz	■				■
	PCS 1900 MHz	■				■

# MSM6025™ Chipset Solution

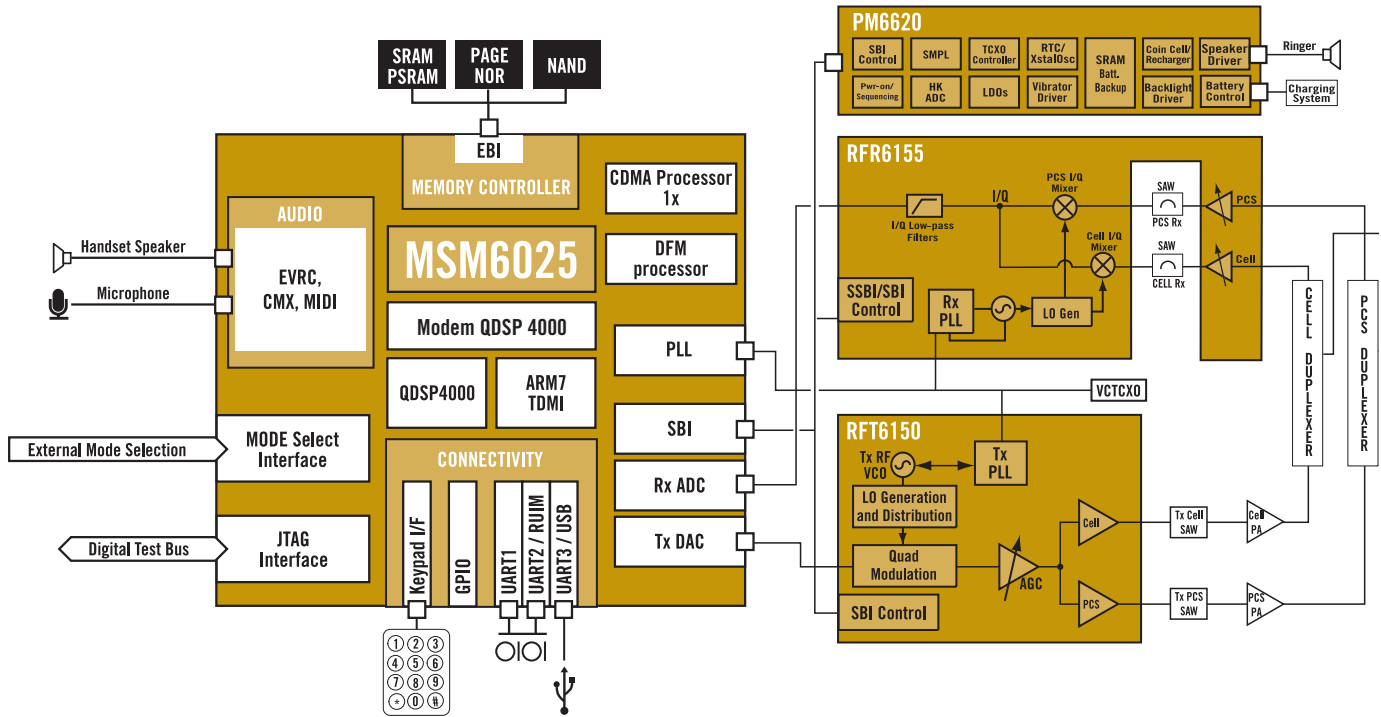

Information shown in this document is only exemplary of QUALCOMM products. QUALCOMM reserves the right to make changes, at any time and without notice, to its products that may cause its products to differ from the information shown in this document. NOTE: Alternative GPS antenna configurations are available.

Go Online

CHIPSET COMPARISON ONLINE TOOL

Please visit [www.cdmatech.com/valueplatform](http://www.cdmatech.com/valueplatform) to view the chipset comparison tool that details specific chipset features.

© 2006 QUALCOMM Incorporated. All rights reserved. QUALCOMM, BREW, PureVoice and radioOne are registered trademarks of QUALCOMM Incorporated. SecureMSM, Launchpad, RFL6000, RFR6000, RFR6120, RFR6170, RFR6122, RFR6155, RFT6100, RFT6120, RFT6170, RFT6122, RFT6150, PM6000, PM6050, PM6610, PM6620, PM6630, PM6640, CMX, powerOne, Mobile Station Modem, MSM, MSM6050, MSM6025, QDSP4000 and Qsynth are trademarks of QUALCOMM Incorporated. Synthetic music Mobile Application Format and SMAF are trademarks of Yamaha Corporation of America. Java is a registered trademark of Sun Microsystems, Inc. in the United States and other countries. CDMA2000 1x is a registered certification mark of the Telecommunications Industry Association. Used under license. ARM7TDMI is a registered trademark of ARM Limited. All other trademarks and service marks are the property of their respective owners. Data subject to change without notice. MSM6025\_6/2006 Rev. D (ACL1054)