


MSM6800™ CHIPSET SOLUTION

QUALCOMM CDMA TECHNOLOGIES

[HTTP://WWW.CDMATECH.COM](http://www.cdmatech.com)

ENABLING THE FUTURE OF COMMUNICATIONS™

MSM6800™ CHIPSET SOLUTION

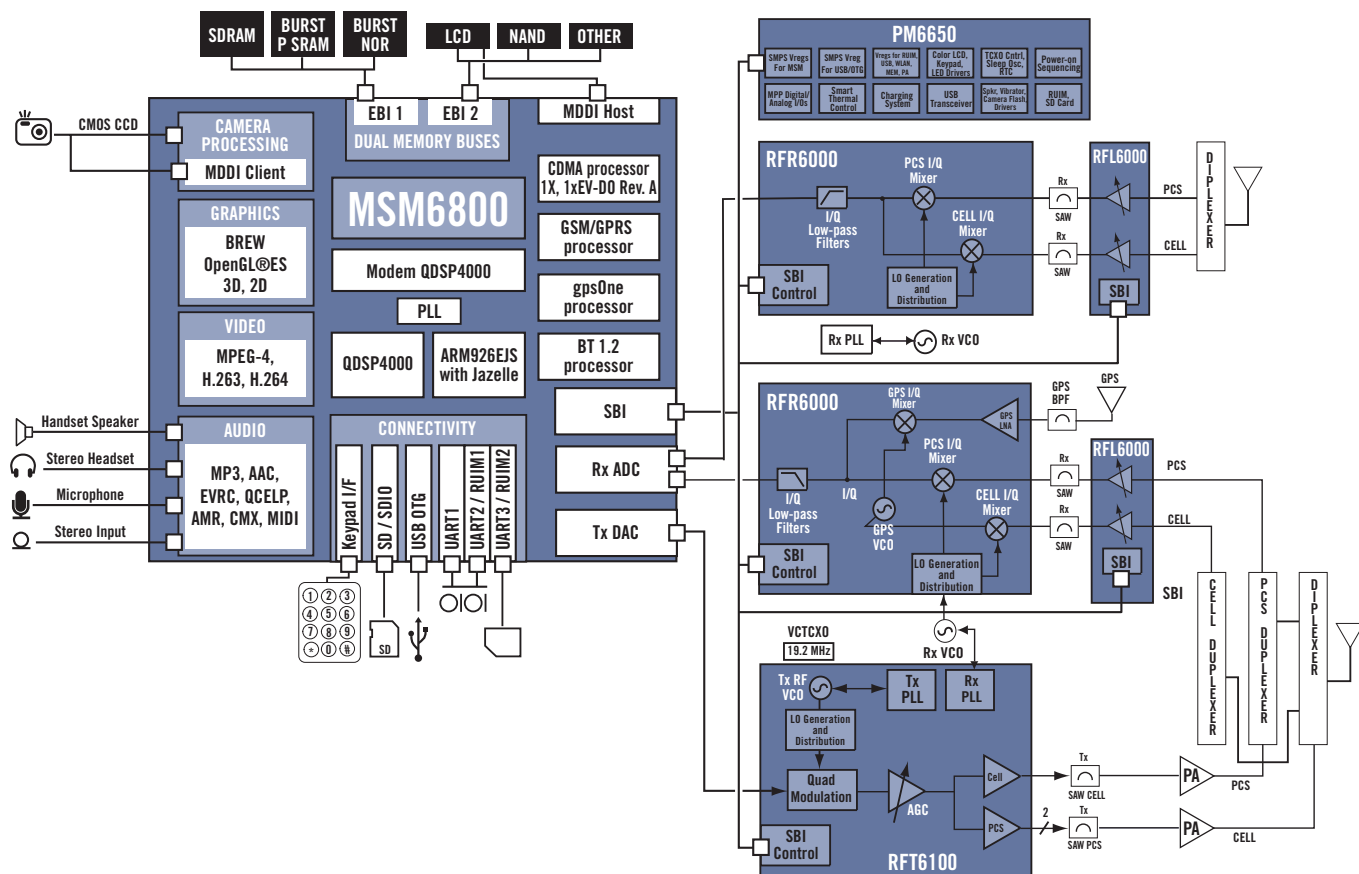

MSM6800 Chipset Architecture Using QCT's radioOne Zero Intermediate Frequency (ZIF)

MSM6800 Chipset Solution



The rapid global expansion of 3G CDMA2000 1X and CDMA2000® 1xEV-DO has extended the availability of high-speed, wireless data access. With increased accessibility has come increased demand for wireless devices that function as camera, camcorder, personal video player, MP3 audio player, gaming console and phone. To efficiently support next-generation data speeds and functionality, wireless devices must integrate applications processors with high-performance modems that support high data rates in both the forward link and reverse link.

To address this growing opportunity, and to support operators migrating to CDMA2000 1xEV-DO Revision A networks, QUALCOMM CDMA Technologies (QCT) has developed the MSM6800™ Mobile Station Modem™ (MSM™) chipset and system software solution.

The MSM6800 solution integrates powerful applications processors into QUALCOMM's proven platform, offering increased processing capacity combined with lower power consumption. With the MSM6800 chipset solution, handset manufacturers can design sleek wireless devices that boast the industry's most advanced image quality and resolution to provide enhanced 3D animation, gaming, streaming video, videoconferencing and more.

In addition to delivering extremely high-speed data transfer, QUALCOMM's MSM6800 solution offers significantly increased processing speeds, higher resolution video and graphics, broadcast, and extended usage times for gaming, video, and business applications — all on a single chip. This single-chip solution eliminates the need for a separate applications processor, decreasing parts count, reducing bill-of-materials (BOM) costs, and supporting the development of ultra-compact devices.

MSM6800™ CHIPSET SOLUTION

MSM6800 Chipset Solution Benefits

- Integrates the CDMA2000 1xEV-DO Revision A modem that is backward compatible with CDMA2000 1xEV-DO Revision 0
- Supports roaming and functionalities in other 2G and 3G networks by including GSM/GPRS
- Integrates dedicated hardware cores into the MSM which eliminates the need for multimedia co-processors — offers superior image quality and resolution for mobile devices and extended application time
- Delivers improved Quality of Service (QoS) and lower data latency
- Enables impressive, user-compelling 3D graphics, multimedia, animation and video
- Provides longer run time for mobile devices over other industry solutions that require companion processors
- Provides superior quality video and graphics with Quarter Video Graphics Array (QVGA) resolution, a fourfold improvement over Quarter Common Intermediate Format (QCIF)
- Offers a higher degree of integration (digital and analog functions on a single chip) and dedicated hardware cores, which decrease power consumption while increasing power and quality
- Eliminates the need for Intermediate Frequency (IF) components, decreasing printed-circuit-board area and reducing time-to-market development and BOM costs
- Enables a wide variety of location-based services and applications, including points of interest, personal navigation and friend finder
- Provides dedicated support for all market-leading codecs and other multimedia formats through a single platform to support carrier deployments around the world
- Supports receive diversity operation in CDMA2000 1X and CDMA2000 1xEV-DO modes, increasing data throughput and improving overall system capacity

MSM6800 Device Description

Based on the industry-leading MSM6550™ architecture, the MSM6800 device integrates the ARM926EJ-S™ processor, offering the ARM® Jazelle™ Java® hardware accelerator; two low-power, high-performance QDSP4000™ digital signal processor (DSP) cores; hardware acceleration for video, imaging and graphics; and a wideband stereo codec to support enhanced digital audio applications. The hardware acceleration eliminates the need for the multimedia companion processors normally required for video and audio-based applications that support MP3 music files, a MIDI synthesizer, video and still-image record and playback, and 2D/3D graphics functions. By removing the need for costly applications co-processors and memory subsystems, the MSM6800 solution reduces BOM costs and increases standby and talk times. The MSM6800 solution integrates both digital and analog functions into a single chip and targets pin and package compatibility with QCT's MSM6550 solution to permit easy re-use of existing terminal designs.

The MSM6800 system solution consists of the MSM6800 baseband processor, complete with CDMA2000 1X, CDMA2000 1xEV-DO and GSM/GPRS protocol stack and multimedia system software. Supporting high data rates of up to 3.1 Mbps on the forward link (FL) and 1.8 Mbps on the reverse link (RL), the MSM6800 chip interfaces with a variety of radio frequency (RF) devices, including:

- Quad-mode chips that enable dual-band CDMA roaming (RFL6000™, RFR6000™, RFT6100™)
- Cost-optimized integrated cellular chips (RFR6120™, RFR6125™, RFT6120™)
- A multimode RF chip that enables CDMA2000 1X (800/900 MHz) and GSM (900/1800 MHz) roaming (RTR6300™)
- A receive diversity chip for CDMA2000 and CDMA2000 1xEV-DO (RFR6500™)

The baseband and RF chipsets are supported by QUALCOMM's powerOne™ series PM6650™ power management device.

MSM6800 Device Features

- CDMA2000 1X support (Revision 0 and A)
- CDMA2000 1xEV-DO support (Revision 0 and A)
- GSM release 99 phase 2 compliant
- GPRS class B multislots class 10
- Receive diversity support for CDMA2000 1X and CDMA2000 1xEV-DO
- High-performance ARM926EJ-S microprocessor core with memory management unit (MMU)
- ARM Jazelle Java hardware acceleration for faster Java-based games and other applets
- QDSP4000 high-performance DSP cores
- 72-polyphony MIDI wavetable synthesizer for high-quality music playback through the MSM6800 integrated wideband codec
- Quarter Video Graphics Array (QVGA) and Common Intermediate Format (CIF) resolutions for LCD
- Video telephony at 15 frames per second (fps), CIF resolution
- Video encode at 15 fps CIF for camcorder capability
- Video decode at 30 fps CIF resolution, streaming or offline
- Dedicated support for market-leading codecs, such as MPEG-4, H.263, H.264, and other multimedia formats to support carrier deployments around the world
- High-quality digital camera processing, supporting CCD or CMOS image sensors up to 4.0 megapixel
- Advanced 2D/3D graphics support for more realistic game play and enhanced user interfaces
- High-speed, serial mobile display digital interface (MDDI), which optimizes the interconnection cost between the MSM device and the LCD panel
- Integrated four-bit secure digital (SD) controller for SD and mini SD cards
- Integrated Bluetooth® 1.2 baseband processor for wireless connectivity to peripherals
- Integrated WAP 2.0-compliant browser with support for multimedia message service (MMS)-based applications
- Integrated JPEG encoder/decoder for content creation and MMS applications
- Integrated stereo (44.1 kHz and 48 kHz) wideband codec capable of CD-quality playback
- Enhanced memory support for NAND, burst mode NOR, SDRAM and burst mode PSRAM
- PureVoice® voice recognition (VR), including speaker-independent digit dialing
- Universal serial bus (USB) On-the-Go (OTG) functionality
- Removable user identity module (R-UIM) and subscriber identity module (SIM) card interface
- Advanced 409-pin 0.5 mm pitch CSP packaging technology (14 mm x 14 mm)

radioOne Technology

As with all members of the MSM6xxx™ family of chipset solutions, the MSM6800 solution features QUALCOMM's radioOne® Zero Intermediate Frequency (ZIF) architecture, which eliminates the need for Intermediate Frequency (IF) components. With radioOne technology, the MSM6800 chipset requires less printed-circuit-board area than previous generations and reduces time-to-market development and BOM costs.

MSM6800™ CHIPSET SOLUTION

RFL6000 Device Description



Integrated into the RFL6000 device are two low noise amplifiers (LNAs): a cellular LNA and PCS LNA. Operating modes — Sleep, Rx, and Rx/Tx — as well as LNA bias currents, are all automatically adjusted via software to minimize DC power consumption. Depending on handset status, the LNA bias current adjusts automatically to meet RF performance requirements with minimal power consumption.

The device is fabricated using a SiGe BiCMOS process, which is suited for high performance RF circuits. The RFL6000 device is packaged in a very small 16-pin bump chip carrier (16-pin BCC++).

RFL6000 Device Features

- Compatibly with QUALCOMM'S ZIF chipset, eliminating receiver and transmitter IF, reducing component count, space and cost
- Two integrated LNAs with programmable gain steps
 - Cellular LNA supports CDMA
 - Operates in cellular bands in China, Japan, Korea and the United States
 - Individual gain setting for CDMA and FM modes
 - PCS LNA supports PCS CDMA operation
 - PCS bands of operation in China, Korea and the United States
- Programmable mode control to reduce DC power consumption
- High-reverse isolation
- Efficient three-line QCT serial bus interface (SBI)
- Low power consumption
- Fabricated in SiGe BiCMOS process
- Small package: 16-pin BCC++ (4 mm x 4 mm)

RFR6000 Device Description



The RFR6000 device is the radioOne ZIF down converter. The device has three mixers which, when combined with the RFL6000 device, provide full RF-to-baseband down conversion for the cellular, PCS and GPS bands. The local oscillator (LO) generation block produces all LO

signals so that only one external single-band voltage control oscillator (VCO) is required for all CDMA frequency bands of operation.

Included on chip is the GPS LNA as well as the entire GPS VCO, including resonant components. The Rx PLL, which resides on the transmit companion IC, the transmit device, is switched between the GPS VCO and the external Rx VCO.

Extension of standby time is achieved by selective circuit power-down, gain control and bias current. These features along with all of the radioOne chipset functionalities are controlled by QUALCOMM'S MSM device.


The device is designed to operate with 2.7 to 3.0 V power supplies and is compatible with single-cell Li-Ion batteries. Compatibility to the digital reference voltage (1.8 to 3.0 V) is assured when the VDDM is connected to the MSM pad voltage.

The RFR6000 device is fabricated using a SiGe BiCMOS process, which provides high-frequency, high-precision analog circuits as well as low-power CMOS functions. Package type is a 40-pin BCC++, which includes a large ground slug for improved grounding, mechanical strength and thermal conductivity.

RFR6000 Device Features

- Part of QUALCOMM'S radioOne ZIF chipset that eliminates the entire IF, reducing component count and space
- Single- or multiband operation cellular, PCS and GPS
- Single- or multimode operation: cellular CDMA, PCS CDMA, cellular FM and GPS
- Full downconversion — RF to baseband
- Receive path circuitry
 - GPS LNA
 - Stepped gain control
 - Three sets of quadrature downconverters
 - Band-specific low-pass filter
 - Baseband amplifiers with DC offset adjustment
- Only one single-band external VCO (Rx VCO) is needed for all CDMA bands of operation for entire radioOne chipset.
- Includes entire on-chip GPS VCO-including resonant circuit
- Individual circuit power on/off controls
- Power reduction feature control extends handset standby time
 - Selective circuit power-down
 - Gain and bias controls
- Low-power supply voltage (2.7 to 3.0 V), low-power dissipation
 - Digital reference voltage is compatible with lower MSM voltage (1.8 to 3.0 Vdd)
- Available in small, thermally efficient package (40-pin BCC++)

RFT6100 Device Description



The RFT6100 device is a direct conversion chipset that integrates all the upconversion and modulation functionality necessary for CDMA-mode phones operating in cellular and PCS bands. This transmit chip consists of two I/Q modulators, one for cellular and one for the PCS band. The baseband I/Q input

from the MSM directly modulates the cellular or PCS carrier derived from the respective LO generation circuit.

Both the cellular and PCS output drive their own variable gain amplifier (VGA) with a gain control range of 85 dB. A final cellular driver amplifier provides a modulated RF output.

To accommodate split-band and filtering, the PCS VGA drives two output amplifiers that can be selected independently or simultaneously via an input selectable switch. All RF outputs have fully integrated 50-ohm matching networks. Integrated on the RFT6100 is the receiver phase locked loop (PLL), the transmit PLL and the entire transmit VCO, including resonant components. The VCO drives the LO generation block, which in turn generates the required local-oscillator signal for all CDMA bands of operation.

RFT6100 Device Features

- Reduction in component count, space and cost via radioOne chipset eliminates receiver and transmitter IF
- Single- or dual-band operation: cellular and PCS
- Single- or multimode operation: cellular CDMA or PCS CDMA
- Full direct upconversion from analog baseband to RF
- Transmit signal path:
 - Baseband amplifier
 - Two sets of quadrature modulators/upconverters
 - RF AGC amplifier, switch network, driver amplifier
- Integration of LO generation circuit
- Requirement of only one external VCO for all CDMA bands of operation
- Entire transmit synthesizer on chip (transmitter PLL and VCO)
- Receiver PLL on chip
- Greater than 85 dB transmit power control range
- Power-reduction feature via MSM control extends handset talk time
 - Optimized for low DC power consumption versus RF output level
 - Transmit puncturing
 - Selective circuit power-down
- Efficient three-line QCT SBI
- Power supply voltage (2.7 to 3.0 V)
- Small thermally efficient package (40-pin BCC++)

RFR6120/RFR6125 Device Descriptions



The RFR6120 and RFR6125 chips, optimized specifically for single-band cellular receive operation, include an integrated CDMA LNA/mixer and UHF VCO. The RFR6125 device additionally includes an integrated GPS LNA/mixer and GPS VCO. The CDMA LNA performs all of the required gain, NF, IP2, IP3 and back isolation for local signal leakage. The integrated UHF VCO covers both cellular and J-CDMA bands and is controlled by the Rx PLL integrated in the RFT6120 chip. The RFR6120 and RFR6125 chips are offered in 6 mm x 6 mm 40-pin Quad Flat No-Lead (QFN40)

packages.

RFR6120/RFR6125 Device Features

- CDMA2000 1X MSM chipset compatibility
- Full direction down conversion — RF to baseband
- Full international cellular band operation support in Japan, China, India, Latin America, Korea and the United States
 - GPS band operation support (RFR6125 only)
 - CDMA mode support
 - GPS mode support (RFR6125 only)
- Receive path circuitry (includes high dynamic range baseband filter, cellular LNA and mixer, GPS LNA and mixer (RFR6125 only), on-chip UHF VCO, on-chip GPS VCO (RFR6125 only)
- Integrated LNA with programmable gain steps
- Individual circuit power on/off controls
- Power reduction feature control extends handset standby time
 - Selective circuit power-down
 - Gain and bias controls
- Efficient three-line QCT SBI
- Low-power supply voltage (2.7 to 3.0 V)
- Digital reference voltage is compatible with lower MSM voltage (1.8 to 3.0 V_{dd})
- Available in small, thermally efficient package (6 mm x 6 mm QFN40)

MSM6800™ CHIPSET SOLUTION

RFT6120 Device Description



The RFT6120 chip, tailored specifically for single-band cellular transmit operation, consumes lower current than its quad-mode predecessor, the RFT6100 device, and is offered in a 5 mm x 5 mm 32-pin Quad Flat No-Lead (QFN32) package.

RFT6120 Device Features

- CDMA2000 1X MSM chipset compatibility
- Full direction up conversion — baseband to RF
- Full international cellular band operation support in Korea, China, India, Latin America and the United States
- Supports full international CDMA2000 1X cellular band*
- Transmit path circuitry
 - Baseband amplifier
 - One set of quadrature modulators/upconverters
 - RF AGC amplifier, driver amplifier with on-chip RF matching
- LO generation circuit integration
- On-chip transmit synthesizer (transmitter PLL and VCO)
- On-chip receiver PLL (to control UHF VCO)
- Transmit power control range greater than 85 dB
- Power reduction feature via MSM control extends handset talk time
 - Optimized for low DC power consumption versus RF output level
 - Transmit puncturing
 - Selective circuit power-down
- Efficient three-line QCT SBI
- Low-power supply voltage (2.7 to 3.0 V)
- Small, thermally efficient package (QFN32)

RTR6300 Device Description



The RTR6300 device is a highly integrated RF device that incorporates a dual-band CDMA2000 1X transmitter with a dual-band GSM/GPRS transceiver. It derives its architecture from QCT's radioOne direct conversion devices for CDMA.

RTR6300 CDMA 1X Transmit Section

The RTR6300 device contains all the upconversion and modulation functionality necessary for CDMA mode wireless devices operating in cellular and PCS bands. This transmit chip consists of two I/Q modulators, one for cellular and one for the PCS band. The baseband I/Q input from the MSM directly modulates the cellular or PCS carrier derived from the respective LO generation circuit.

Both the cellular and PCS output drive their own VGA with a gain control range of 85 dB. A final cellular driver amplifier provides a modulated RF output. To accommodate split-band and filtering, the PCS VGA drives two output amplifiers that can be selected independently or simultaneously via an input selectable switch. All RF outputs have fully integrated 50-ohm matching networks.

Integrated on the RTR6300 device are the receiver PLL, transmit PLL and the entire transmit VCO, including resonant components. The VCO drives the LO generation block, which in turn generates the required local oscillator signal for all CDMA bands of operation.

RTR6300 CDMA 1X Transmit Key Features

- Component count reduction in space and cost through the radioOne chipset, eliminating receiver and transmitter IF
- Single- or dual-band operation: cellular and PCS
- Single- or multimode operation: cellular CDMA or PCS CDMA
- Full direct upconversion from analog baseband to RF
- Transmit signal path:
 - Baseband amplifier
 - Two sets of quadrature modulators/upconverters
 - RF AGC amplifier, switch network, driver amplifier
- LO generation circuit integration
- Single VCO requirement for all CDMA bands of operation
- Integrated transmit synthesizer (transmitter PLL and VCO on chip)
- PLL receiver on chip
- Transmit power control range over 85 dB
- Power reduction feature via MSM control extends handset talk time
 - Low DC power consumption optimization versus RF output level
 - Transmit puncturing
 - Selective circuit power-down
- Efficient three-line QCT SBI
- Power supply voltage (2.7 to 3.0 V)
- Small thermally efficient package (48-pin BCC++)

RTR6300 GSM/GPRS Transceiver Section

The RTR6300 device also has an integrated transceiver for GSM bands for both GSM and GPRS modes. It contains a dual-band GSM/GPRS translational loop transmitter, which consists of low-pass filtering with DC offset correction circuitry, I/Q modulators and offset phase locked loop (OPLL). The transmit signals are derived from the baseband interface of the MSM6800 device. The signals are modulated to IF through the I/Q modulators, then applied to the OPLL where its output drives the GSM power amplifier (PA). The GSM receiver contains two LNAs, two direct conversion mixers and low-pass filtering. Also on this chip are two UHF PLLs designed to support fast channel acquisition for GPRS and 3GPP compress mode operation.

The RTR6300 device voltage range is from 2.7 to 3.0 V, which provides operating compatibility for platforms utilizing a single-cell Li-Ion battery design. Operating modes for the RTR6300 device are controlled by the MSM6800 chip via the three-line SBI and include selective power-down and gain control for optimal power savings and talk-time improvement. The RTR6300 device is fabricated on an advanced SiGe BiCMOS process, which accommodates both precision high-frequency analog circuits and low-power CMOS functions, and is provided in a 48 BCC++ plastic package that includes an exposed center ground slug for improved RF grounding, mechanical strength and thermal continuity.

RTR6300 GSM/GPRS Key Features

- Simple single-pole RC baseband reconstruction filter (between MSM6800 DAC and RTR6300 device)
- Integrated synthesizer and LO generator system for GSM Tx/Rx and CDMA2000 1X Tx bands (eliminating external RF components)
 - Fast channel acquisition support for GPRS with two PLLs
- GSM receiver with settable gain states
- Differential LNAs, mixers and baseband filter integration for receive GSM operation
- GSM translational loop transmitter
 - Need for second local oscillator eliminated
 - Integrated low-pass filter and precision I/Q modulator
- DC auto-calibration system integration for GSM Tx/Rx operation
- MSM6800-controlled operation with newer, faster SBI
- Supply voltage from 2.7 to 3.0 V
- 48-pin BCC++ (7 mm x 7 mm)

RFR6500 Device Description



The RFR6500 is a highly-integrated RFIC that implements dual-band CDMA receive diversity to improve signal reception, thereby enabling higher data throughput and increases in forward link network capacity. Cellular and PCS operation is supported, with primary and diversity receivers on-chip. In addition, a

GPS receiver is integrated on-chip to enable simultaneous position location

RFR6500 Device Features

- Integral to the MSM7500-based chipset that eliminates receive and transmit intermediate frequencies, thereby reducing component count, space, and cost
- Supports single- or dual-band CDMA phones: cellular and/or PCS
- Dedicated GPS receiver enables simultaneous position location
- Primary receiver paths for cellular and PCS CDMA operation (IS-95, CDMA2000 1X, and/or CDMA2000 1xEV-DO)
- Secondary receiver paths for cellular and PCS CDMA or GPS position location operation
- Direct downconversions from RF to analog baseband
- Flexible LO distribution circuits that allow versatile Rx operating modes
- Power reduction features via MSM control extends handset standby and talk time
- Low power supply voltage (2.7 to 3.0 V)
- Small, thermally efficient package (QFN56)

powerOne Series PM6650 Device Description



The MSM6800 device also interfaces directly with the first in QCT's powerOne series power management ICs, the PM6650 device. The PM6650 solution provides battery management and charging functions, including a USB charging option, and voltage regulation for the various MSM

power regimes, the radioOne device and all other MSM-supported peripheral features. Exceptional power savings are realized through the use of a switch-mode power supply (SMPS) from the PM6650 device to regulate the MSM's core voltage. All voltages generated for the MSM and radioOne RF chips are optimized for handset system control with the MSM6800 system software.

The PM6650 chip offers unparalleled integration of power management functions for CDMA terminals, affording a tremendous savings in size and BOM for handset design. Integrated features include a color LCD backlight driver, USB OTG transceiver, R-UIM and SD Card interface, PA bias control, speaker driver, real-time clock, TCXO control, and various general housekeeping and interface functions — making the PM6650 chip the ideal power management solution for feature-rich terminals.

PM6650 Key Features

- Complete battery management, voltage regulation, general housekeeping and user-interface functions
- QUALCOMM's radioOne ZIF chipset (and all MSM-supported peripheral features) compatibility
- Trickle, fast, constant voltage and pulsed charging modes for the main battery, with current monitoring for over-current protection
- Available USB charging option with automatic charging source selection
- Complex power management, including MSM power-on sequencing and control, and dynamic voltage scaling for maximum power savings
- SMPS provides high-efficiency voltage regulation for the MSM core, 1.8 V high-speed external bus interface and memory circuits
- SMPS voltage control for optimized PA V_{dd} and bias control for maximum talk-time performance
- SMPS voltage generation for white LEDs used for color LCD backlighting
- USB OTG transceiver
- Configurable multi-purpose pins (MPPs) for digital or analog I/O utility functions such as general-purpose LED drivers, USIM or SD-Card-level translation, programmable resistors or digital switches
- High-current LED driver for camera flash application
- Speaker driver with programmable gain, turn-on time, and muting; single-ended or differential operation (drives external 8-ohm speakers with volume-controlled 500 mW)
- Real-time clock for tracking time, calendar functions and programmed durations and for generating associated alarms
- TCXO control with warm-up, synchronization, and buffering of the TCXO signal for optimal QPCH/catnap timing and maximum standby-time performance
- Automated power-on recovery from sudden momentary power loss
- Coin cell back-up battery support (including charging)
- 84 BCCS dual-row bump chip carrier package (7 mm x 7 mm)

The Launchpad Suite of Technologies

The Launchpad™ suite of applications technologies offers wireless operators and manufacturers a cost-effective, scalable and timely solution for providing advanced wireless data services. This seamlessly integrated solution enables advanced next-generation applications and services that incorporate multimedia, position location, connectivity, customized user interface and storage capabilities. Launchpad features are available for each QUALCOMM chipset, closely matching the specific functionality and cost-target objectives agreed upon in joint product planning with manufacturers and wireless service operators worldwide.

The MSM6800 solution supports the advanced feature set of QUALCOMM's Launchpad suite of technologies, including streaming video and audio; still-image and video encoding and decoding; 2D and 3D graphics acceleration; Java acceleration and a megapixel camera interface. The MSM6800 solution also integrates gpsOne™ functionality — enabling a wide variety of location-based services and applications, including points of interest, personal navigation and friend finder.

Integrated into the MSM6800 solution are Bluetooth wireless connectivity and USB On-the-Go (OTG) host controller functionality, allowing seamless communication directly with printers, digital cameras, keyboards and other accessories.

QUALCOMM's BREW Solution

The MSM6800 includes support for QUALCOMM's BREW™ solution. BREW is a complete product and business system for the development and over-the-air deployment of data services on wireless devices. The BREW system provides the necessary tools and value-added services to developers, device manufacturers and wireless operators for application development and distribution, device configuration, and billing and payment.

QUALCOMM's Complete Solution — Our Commitment to Our Partners

QUALCOMM CDMA Technologies is enabling the future of communications. We work closely with our manufacturer and operator partners to develop solutions that meet market needs today and provide the technology foundation for the wireless communications of tomorrow. Our world-class CDMA engineers create detailed reference designs to accelerate testing and deployment for our partners. And our chipsets and system software are fully integrated and able to bring advanced features and functionality to today's wireless devices. With QUALCOMM CDMA Technologies, manufacturers and operators can offer sophisticated wireless solutions that succeed in the global marketplace.

* For CDMA with AMPS requirements, the RFT6100 is recommended.



Copyright © 2004 QUALCOMM Incorporated. All rights reserved. QUALCOMM, radioOne and PureVoice are registered trademarks of QUALCOMM Incorporated. MSM6800, Mobile Station Modem, MSM, MSM6550, QDSP4000, RFL6000, RFR6000, RFT6100, RFR6120, RFR6125, RFT6120, RTR6300, RFR6500, powerOne, PM6650, MSM6xxx, Launchpad, gpsOne, Binary Runtime Environment for Wireless and BREW are trademarks of QUALCOMM Incorporated. Java is a registered trademark of Sun Microsystems, Inc., in the United States and other countries. ARM926EJ-S, Jazelle and the ARM logo are trademarks or registered trademarks of ARM Limited. Bluetooth and the Bluetooth logos are registered trademarks owned by Bluetooth SIG, Inc., USA. CDMA2000 is a registered trademark of the Telecommunications Industry Association (TIA USA). OpenGL ES is a trademark of Silicon Graphics. All other trademarks and servicemarks are the property of their respective owners. Data subject to change without notice. Printed in the USA 4/2004 MSM6800-FB X2